

TO-92 D`Ugh]W!9bWUdg i`UhY`HfUbglghcfg`


FEATURES

General Purpose Switching and Amplification.
VÜŒPÙQÙVUÜÁCÚPÚD

A97<5B=75@ 85H5

Ôæ•ñí•c^|~K V U E J G A { [l á ^ á h] | æ • c &
T [" } c } * Á] [• á c [} K a } ^

TO-92

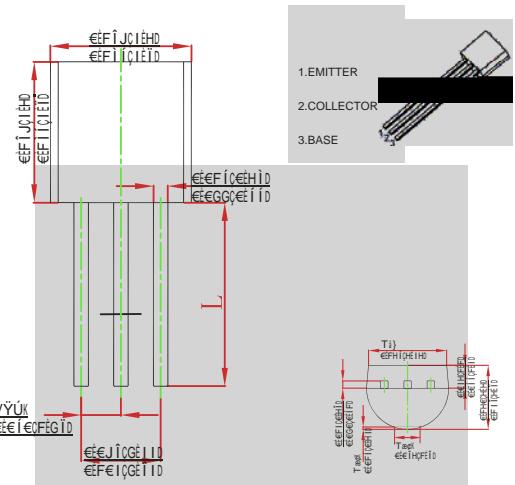

A5L-A1A F5H-B ; G 5B8 7<5F57H9F-GH-7G

O G I » O C { à á ^ c V ^ {] ^ ! æ c ^ { ^ c ^ } | ^ o o [c @ ^ ! , à o ^ } [c ^ á D

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-40	V
V_{CEO}	Collector-Emitter Voltage	-25	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_c	Collector Current -Continuous	-1.5	A
P_c	Collector Power Dissipation	1	W
R_{JA}	Thermal Resistance From Junction To Ambient	125	
T_j	Junction Temperature	150	
T_{stg}	Storage Temperature	-55~+150	

ELECTRICAL CHARACTERISTICS

a

