

| | SYMBOL | 2005 | 202 | 204 | 206 | 208 | 210 | |
|--------------------------------------|----------------|------|-----|-----------|-----|-----|-----|---------|
| RMS Reverse Voltage | V_{5RM} | | | | | | | |
| | V_{RWM} | | | | | | | |
| | V_{DC} | | | | | | | |
| | V_{RMS} | | | | | | | |
| | I_o | | | 2.0 | | | | A |
| | I_{FSM} | | | 0 | | | | A |
| Forward Voltage per element @IF=2.0A | V_{FM} | | | 1.1 | | | | V |
| | I_R | | | 5.0 | | | | μA |
| | | | | 500 | | | | |
| | R - \$ | | | | | | | |
| | R - / | | | | | | | |
| | T_J, T_{STG} | | | -55to+150 | | | | |

Typical Fwd Characteristics


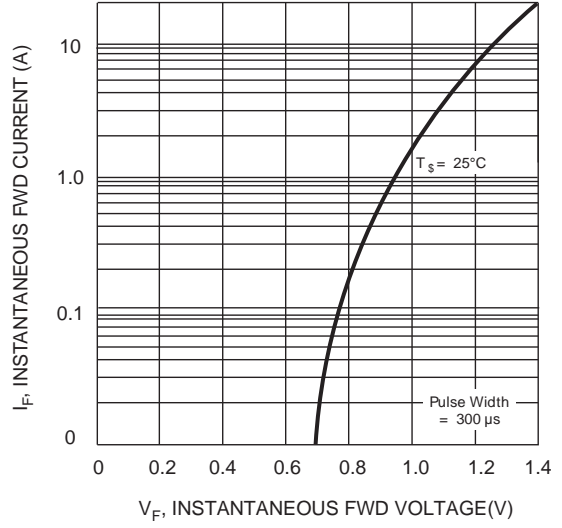


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

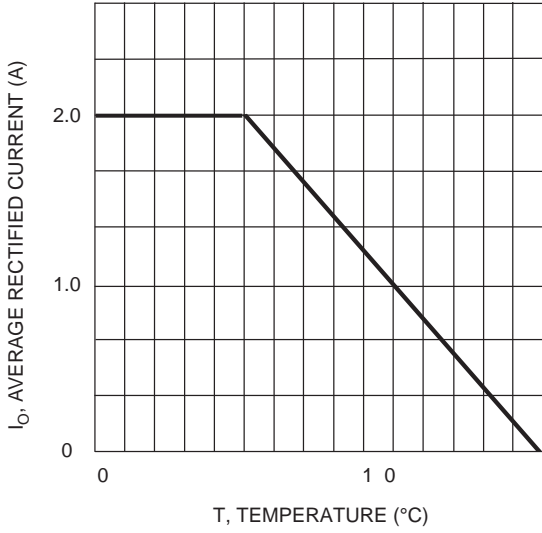