

	SYMBOL	2005	202	204	206	208	210	
RMS Reverse Voltage	V_{5RM}							
	V_{RWM}							
	V_{DC}							
	V_{RMS}							
	I_o			2.0				A
	I_{FSM}			0				A
Forward Voltage per element @IF=2.0A	V_{FM}			1.1				V
	I_R			5.0				μA
				500				
	R - \$							
	R - /							
	T_J, T_{STG}			-55to+150				

Typical Fwd Characteristics


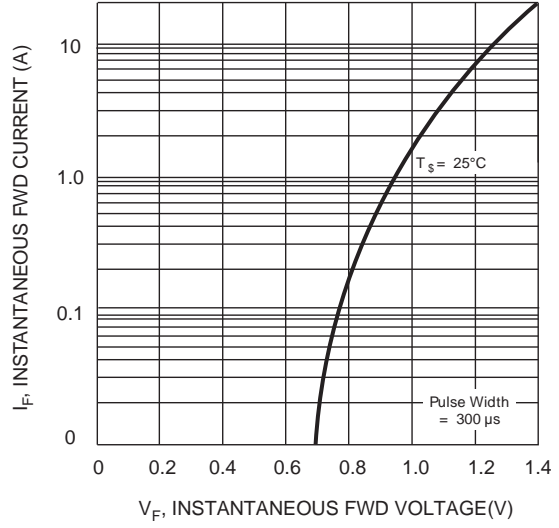


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

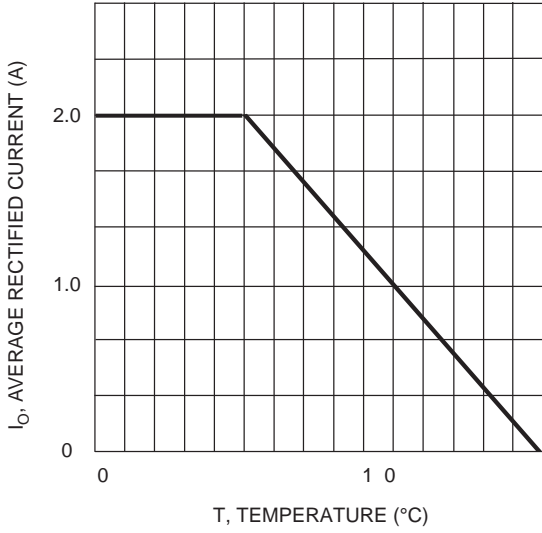