


MPSA13

TO-92 D`Ugh]W!9bWUdg i`UhY`HfUbg]ghc fg`




: 95HI F9G`
 Öæ!|ä) *c[]ÁV!æ} •i•c[]•
 VÜÆÞÜQÜVVUÜÄÇÞÚÐ

A97<5B=75@ 85H5
 Ôæ•^!•c`|^\VUËJGÁ { [[á^áá]]|æ•cá&
 T [~ }cá} *Á] [•äcá []Kæ} ^

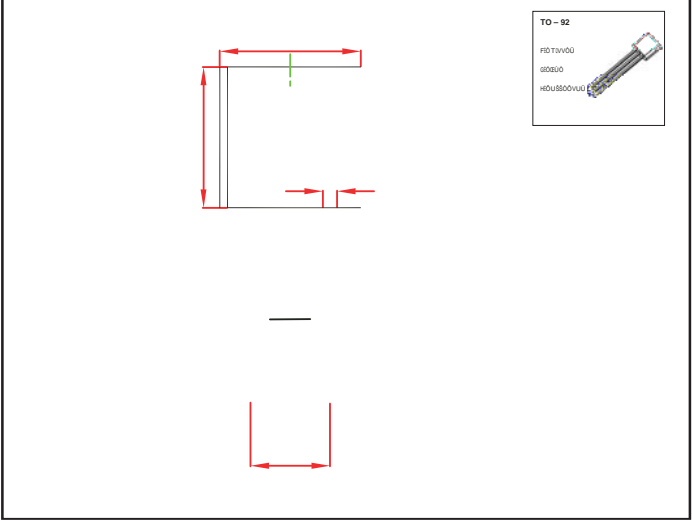

	Collector-Base Voltage	3	V
	Collector-Emitter Voltage	3	V
	Emitter-Base Voltage	1	V
	Collector Current -Continuous		A
	Collector Power Dissipation	62	m
θ	Thermal resistance from junction to Ambient	2	°C /W
	Junction Temperature	150	°C
	Storage Temperature	- ~+150	°C

MPSA13	TO-92	Bulk	1000pcs/Bag
MPSA13-TA	TO-92	Tape	2000pcs/Box

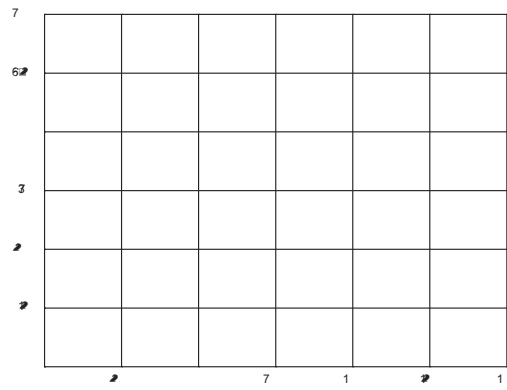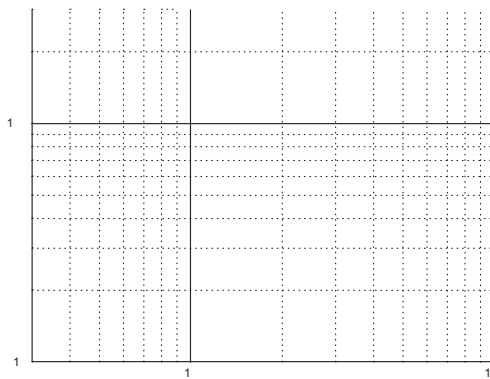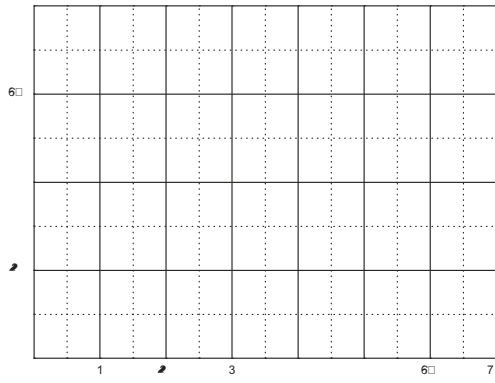

TO-92 PACKAGE TAPING DIM