

' 2


3 / \$ 6 76, & , & 2 5 (& 7 ,) , (5 6

FEATURES

" / RZ IRUZDUG YROWDJH GURS
 " + LJK FXUUHQW FDSDELOLW \
 " + LJK UHOLDELOLW \
 " + LJK VXUJH FXUUHQW FDSDELOLW \
 " + LJK VSHHG VZLWFKLQJ

MECHANICAL DATA

" Case: JEDEC DO-27, molded plastic
 " Terminals: Axial lead, solderable per
 " MIL-STD-202, Method 208
 " Polarity: Color band denotes cathode
 " Mounting position: Any

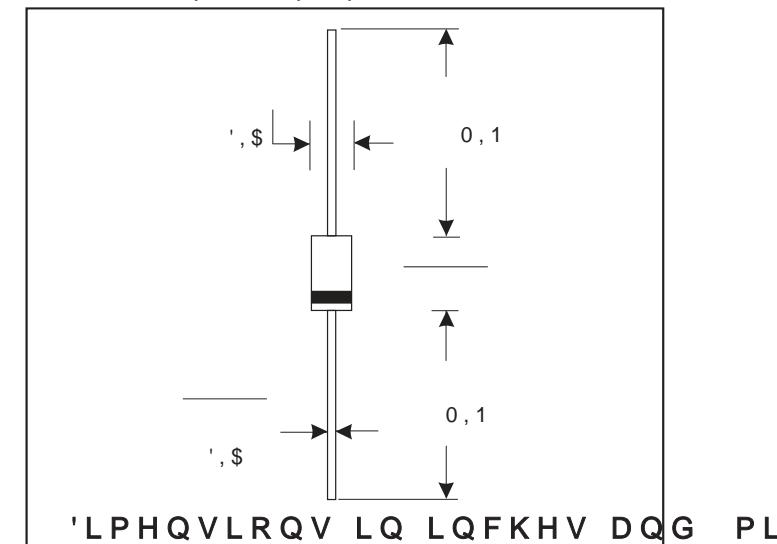

0 \$; , 0 8 0 5 \$ 7 , 1 * 6 \$ 1 ' & + \$ 5 \$ & 7 (5 , 6 7 , & 6

f & P E L H Q W S H U D X Q Q U R H W K H U Q Z R L W H G

SF31	SF32	SF33	SF34	SF35	SF36	SF37	SF38	
------	------	------	------	------	------	------	------	--

Lead Length at $T_A=75$	$I_{F(AV)}$	3.0	A
Peak Forward Surge Current, 8.3 ms single halfsine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	125.0	A
Maximum Instantaneous Forward Voltage at 3.0A	V_F	1.0	V
Maximum reverse current @ $T_A=25$	I_R	5.0	-A
at rated DC blocking voltage @ $T_A=100$		50.0	
Maximum reverse recovery time (Note1)	t_{rr}	35	ns
Typical junction capacitance (Note2)	C_J	40	pF
Typical thermal resistance (Note3)	R_{JA}		

6) a 6)

5 \$ 7 , 1 * 6 \$ 1' & + \$ 5 \$ & 7 (5 , 6 7 , & & 8 5 9 (6

) , * 7 (6 7 & , 5 & 8 , 7 ' , \$ * 5 \$ 0 \$ 1' 5 (9 (5 6 (5 (& 2 9 (5 < 7 , 0 (& + \$ 5 \$ & 7 (5 , 6 7 , &

AA

