



Features

V@^Á]æ•cá&Á]æ&\æ*^Á&æ!iá^•ÁW}á^! , !ác^!•ÁŠæà[!æc[!^Á
 Ø|æ { { æàá|æc^ÁÖ|æ••á-á&æcá[]ÁJ|XÉ€Á
 Ø[!Á•~!-æ&^Á { [~ }c^áÁæ]]á&æcá[]•
 Ó~á|cÉá}Á•c!æá}Á!^!á-Éáá^æ|Á- [!Áæ~c[{ æc^áÁ] |æ&^ { ^ }cÁ
 Š[, Á-[! , æ!áÁç[|cæ*^Áá! []Á
 Pá*@Á-[! , æ!áÁ•~!^Á&~!^Á}cÁ&æ]æàá|æc^Á
 Pá*@Ác^ {]^!æc~!^Á• [!á^!á} *Á*~æ!æ}c^Áá
 Gí€ÁÖ!F€Á•^&[]á•ÁæcÁc^! { á }æ!•

F5H=B ; G 5B8 7<5F57H9F=GH=7 7 I FJ9G

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

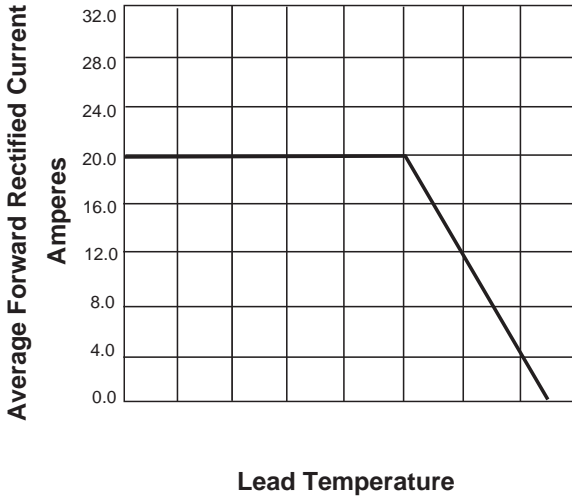


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

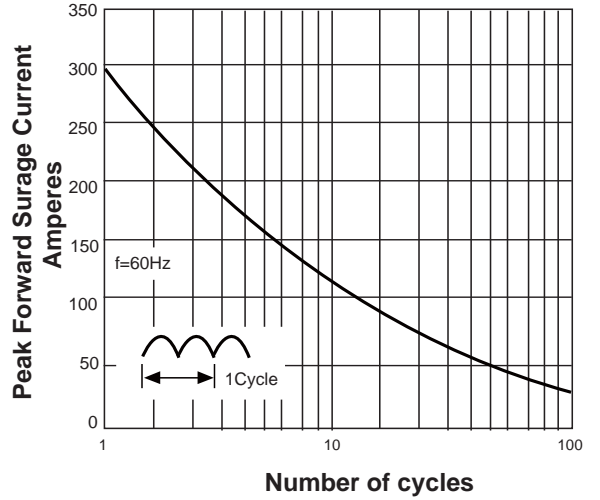


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

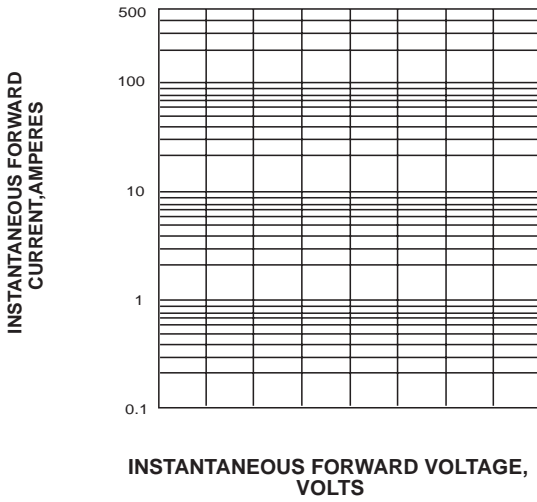


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

